

### Driver-X Leather Gloves

The skin of the palms and hands is made of leather and without lining. Specifically designed for use at low risk jobs requiring clutch.

#### Palm and Upper Material

In order to increase the resistance, goat hide has been used in hand palm and upper side of the hand area.



**Marking Field Includes**  
All information required to be provided as per the European norms.


**Safety Cuff**  
To cover the wrist area, it has made from elastic material..

### Technical Specifications

Glove Palm Material*	Goat leather
Glove Back Material	Goat leather
Lining Material	-
Sizes	10/XL
Carton Content	72 Pairs
Packaging	1 Pairs
Category	CAT II
Standards	EN 388:2016+A1:2018 (2X11X) EN ISO 21420: 2020

# STARLINE

## ● REINFORCEMENT AREA AND LINING INFORMATION

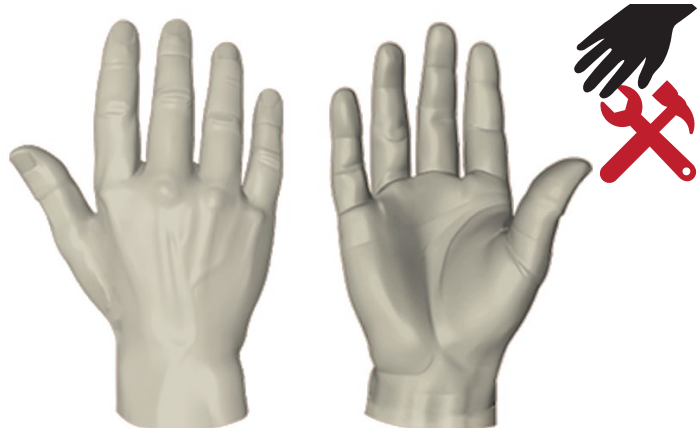

### REINFORCEMENT AREA

Driver-X Gloves are sewn in one piece. Any reinforcement is not available in the palm and fingers.

### COTTON LINING

These gloves are produced without liners.

## ● STANDARDS

These gloves are intended to protect the hands against mechanical hazards as defined in the PPE Regulation (EU) 2016/425. This product is certified as per EN ISO 21420 (General requirements and inspection methods for protective gloves) and EN 388 (Mechanical Risk Protection).

EN388:2016  
+A1:2018



2X11X

EN ISO 21420:  
2020



## ● Areas of Use



Automotive and Transportation



Cleaning




Logistic and Storage

Suitable for simple mechanical work in many industries. It is suitable for use in many assembly processes, packaging processes, handling and lifting operations only in applications with a slight risk.

# STARLINE

## STANDARD REMARKS

### EN 388:2016 EN 388:2016+A1:2018 Protective Gloves for Mechanical Risks



abc def

This standard covers features and test methods for protective gloves against mechanical risks such as abrasion, cutting, tearing, puncturing.

#### FEATURES:

Protective gloves conforming to this standard must meet all applicable properties of EN ISO 21420. The performance level of a protective glove against mechanical risks should be at a higher level for one of the attributes (wear, knife cutting, tearing, puncture and impact protection) that are classified according to the least features of each level shown in the table below.

Note - Gloves that meet the specifications for puncture resistance may not be suitable for protection against sharp-pointed objects such as hypodermic needles.

The letter **X** means that the test has not been done or can not be performed.

PERFORMANCE LEVELS	1	2	3	4	5
a - Abrasion resistance (number of cycles)	100	500	2000	8000	-
b - Cut resistance (index)	1,2	2,5	5,0	10,0	20,0
c - Tear resistance (N)	10	25	50	75	-
d - Puncture resistance (N)	20	60	100	150	-

PERFORMANCE LEVELS	A	B	C	D	E	F
e - Cut Resistance (N)	2	5	10	15	22	30
f - Protection Against Impact	Pass (P) / Failed (No sign)					

### EN ISO 21420:2020



#### EN ISO 21420 General Specifications and Test Methods

This standard specifies the general requirements for the glove design and construction, protection against hazards, comfort, efficiency and marking and information applicable to all protective gloves. This standard also applies to arm protections.

Many gloves designed for electrical technicians or the most private applications such as surgical operations are governed by private and strict standards.

GLOVE SIZE	Fits Hand Size	Hand Circumference / Length	Minimum Glove Length
6	6	152/160 mm	220 mm
7	7	178/171 mm	230 mm
8	8	203/182 mm	240 mm
9	9	229/192 mm	250 mm
10	10	254/204 mm	260 mm
11	11	279/215 mm	270 mm

\* For more detailed information on Standards, you can obtain **EN European Glove Standards Guidelines** from [www.starlinesafety.com](http://www.starlinesafety.com).

# STARLINE

## USAGE INFORMATION



### Maintenance and Cleaning

We recommend you to clean gloves by a brush made of synthetic materials. Glove cleaning should not be carried out through rigid and tearing materials. It should be never washed by hand or in the washing machine. It is the responsibility of user to control whether glove is suitable for intended use or not, whether it is complete or not and whether protective functions are undamaged or not. User should carry out an examination against potential defects which are likely to adversely affect protection functions (punctures, tears, damaged seams, etc.).



### Service Life

Gloves should be used within five years as of the manufacture date. Service life of the gloves is affected by several factors such as cold, hot, chemicals, sunlight and inadvisable storage.



### Storage

Storage is a part of the maintenance and cleaning but is often ignored. Protective gloves should be stored in their original packaging which will keep them away from direct sunlight, chemicals and abrasive materials and protect them against physical damages of the hard surfaces or materials when it is not used or during shipment. Product should be stored in a dry and well-ventilated place. Availability of excessive humidity or intense light may adversely affect the product quality.

## Order Information

MODEL	Size	Barcode	Box Quantity	Box Dimesion	Box Weight
Driver-X	10 / XL	8698547319949	72 Pairs	31 x 46 x 26cm	8.0kg.