


E-125515 Anti-Vibration Gloves

The continuous and intense vibration impacts created by vibrating hand tools cause great discomfort to the user as the application period increases. When exposed for a long time, it causes serious diseases that are irreversible. It can cause fatigue, swelling in the hands and white finger disease in long-term use. This glove can be used in every sector where vibrating hand tools are used. It has a special plastic protection on the hand that provides protection against impacts.

Reinforcement Section
Thickened foam rubber backing absorbs vibrations

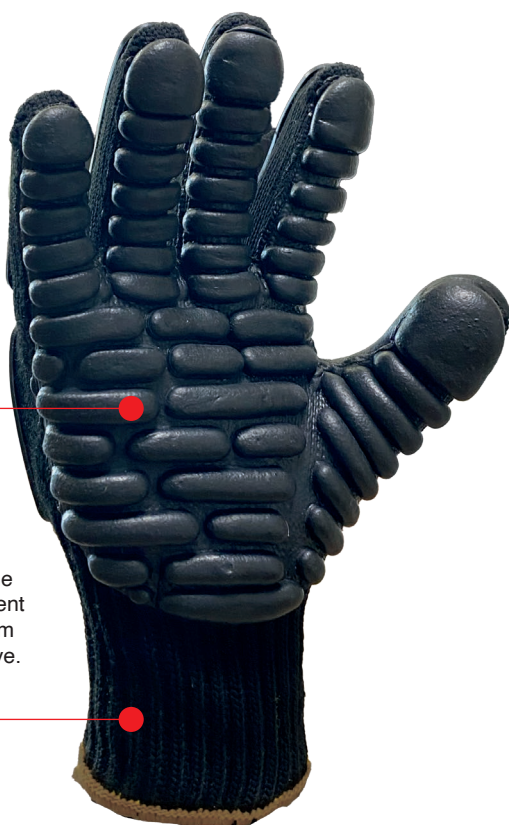

Elastic Wrist Band
It is designed to keep the glove in place and prevent external substances from penetrating into the glove.

Glove Reinforcement
A thermoplastic rubber material reinforcement has been added to protect against possible impacts from the top of the hand. In addition to the cut resistance of the glove, this reinforcement also provides protection against impacts.



Marking Area
It is stated on the front of the glove. It contains all the information that must be given according to European standards.



Technical Specifications

Lining Material	Polyester
Coating Material	Foam Rubber
Size	9/L, 10/XL
Box Quantity	30 Pairs
Packaging	1 Pair
Category	CAT II
Standards	EN 388:2016 (3141AP)
	EN ISO 21420:2020
	EN ISO 10819:2013+A1:2019

STARLINE

GLOVE TEXTURE AND LINING INFORMATION




FOAM RUBBER COATING

These gloves offer excellent comfort to the user during work with vibrating hand tools that require a dry grip, thanks to the specially shaped foam rubber coating on the palm.

POLYESTER LINING

It offers excellent comfort during applications where objects are held thanks to its polyester lining. It provides protection against sweat thanks to its excellent air permeability.

 Indicates the coating and reinforcement area.

STANDARTLAR

These gloves are designed to protect the hands against mechanical hazards as defined in the PPE Regulation (EU) 2016/425. This product has passed the tests EN ISO 21420 (General requirements and inspection methods for protective gloves), EN 388 (Protection against Mechanical Risks) and EN ISO 10819 (Mechanical vibration and shock - Hand arm vibration - Method for the measurement and evaluation of vibration transmitted through gloves to the palm of the hand).


EN388:2016



3141AP

EN ISO 21420 :2020



 EN ISO 10819:2013+A1:2019		
Property	Necessity	Result
Mid-frequency spectrum "M"	≤0.90	0.865
High frequency spectrum "H"	≤0.60	0.598



Areas of Usage



Woodwork



Building and Construction



Automotive and Transportation



Metal Production



Machine and Equipment




Logistics and Warehousing

These gloves are suitable for use in manufacturing of wood, wood products and cork products, manufacturing of paper and paper products, manufacturing of iron, steel and metal products, manufacturing of general purpose machines, manufacturing of planes or transport roads such as railways, automobiles, construction works in and outside of buildings, transportation and storage works, handling of glass and glass products and mechanical works.

STARLINE

STANDARD REMARKS

EN 388:2016



a b c d e f

EN 388 Protective Gloves for Mechanical Risks

This standard covers features and test methods for protective gloves against mechanical risks such as abrasion, cutting, tearing, puncturing.

FEATURES:

Protective gloves conforming to this standard must meet all applicable properties of EN 420. The performance level of a protective glove against mechanical risks should be at a higher level for one of the attributes (wear, knife cutting, tearing, puncture and impact protection) that are classified according to the least features of each level shown in the table below.

Note - Gloves that meet the specifications for puncture resistance may not be suitable for protection against sharp-pointed objects such as hypodermic needles.

The letter **X** means that the test has not been done or can not be performed.

PERFORMANCE LEVELS	1	2	3	4	5
a - Abrasion resistance (number of cycles)	100	500	2000	8000	-
b - Cut resistance (index)	1,2	2,5	5,0	10,0	20,0
c - Tear resistance (N)	10	25	50	75	-
d - Puncture resistance (N)	20	60	100	150	-

PERFORMANCE LEVELS	A	B	C	D	E	F
e - Cut Resistance (N)	2	5	10	15	22	30
f - Protection Against Impact	Pass (P) / Failed (No sign)					

EN ISO 10819:2013 +A1:2019



EN ISO 10819:2013+A1:2019

Mechanical Vibration and Shock - Hand, Arm Vibration - Method for Measurement and Evaluation of Vibration Transmitted from Glove to Palm

SCOPE AND FIELD OF APPLICATION

This standard covers laboratory analysis for the measurement, evaluation and data analysis of vibration transmitted from the handle to the glove, from the glove to the palm, in the frequency range 31.5Hz - 1250Hz.

This standard is intended as a straining test to measure the vibration transmission of gloves to represent the specific use conditions of some hand-held and hand-guided machines and tools. Many factors are known to affect the vibration transmission of gloves. For this reason, the transmission values obtained according to this standard are not sufficient to make an assessment of health-related hazards caused by vibrations. The transmission of vibration is measured and recorded for two input spectra. It can also be represented as a function of frequency.

* For more detailed information on Standards, you can obtain **EN European Glove Standards Guidelines** from www.starlinesafety.com.

STARLINE

STANDART AÇIKLAMALARI

EN ISO 21420
:2020



EN ISO 21420 General Specifications and Test Methods

This standard specifies the general requirements for the glove design and construction, protection against hazards, comfort, efficiency and marking and information applicable to all protective gloves. This standard also applies to arm protections.

Many gloves designed for electrical technicians or the most private applications such as surgical operations are governed by private and strict standards.

GLOVE SIZE	Fits Hand Size	Hand Circumference / Length	Minimum Glove Length
6	6	152/160 mm	220 mm
7	7	178/171 mm	230 mm
8	8	203/182 mm	240 mm
9	9	229/192 mm	250 mm
10	10	254/204 mm	260 mm
11	11	279/215 mm	270 mm

USER GUIDE



Maintenance and Cleaning

We recommend you to clean gloves by a normal detergent with 40-60°C of water with maximum of 3 times. After the washing, the performance may not be seen which it is featured in associated pictograms. It is the responsibility of user to control whether glove is suitable for intended use or not, whether it is complete or not and whether protective functions are undamaged or not. User should carry out an examination against potential defects which are likely to adversely affect protection functions (punctures, tears, damaged seams, etc.).



Service Life

Gloves should be used within three years as of the manufacture date. Service life of the gloves are affected by several factors such as cold, hot, chemicals, sunlight and inadvisable storage.



Storage

Storage is a part of the maintenance and cleaning but is often ignored. Protective gloves should be stored in their original packaging which will keep them away from direct sunlight, chemicals and abrasive materials and protect them against physical damages of the hard surfaces or materials when it is not used or during shipment. Product should be stored in a dry and well-ventilated place. Availability of excessive humidity or intense light may adversely affect the product quality.

Sipariş Bilgisi

MODEL	Size	Barcode	Box Quantity	Box Dimension	Box Weight
E-125515	9 / L	8680907006644	30 Pairs	45 x 35 x 40 cm	8,30 kg
E-125515	10 / XL	8680907006675	30 Pairs	45 x 35 x 40 cm	8,60 kg