MK-02

The adjustable headband fits a variety of head sizes with ease. The soft foam cushions provide optimal comfort and sound isolation. The quick-switch system allows the user to change the cushions easily and swiftly.



Technical Specifications

Part	Specification		
Shell Material	ABS		
Headband	Bracket		
Cushion Materia	Foam Cushion		
Color	Green		
SNR	28 dB.		
Weight	225 g		
Quantity per Box	30 Units		
Packaging	1 Unit		
Category	CAT III		
Standards	EN 352-1		

STANDARDS -

These products are classed as Personal Protective Equipment (PPE) by the European PPE Regulation (EU) 2016/425 and have been shown to comply with this Regulation through the European Standard: EN352-1:2002 (Hearing Protectors – General Requirements – Ear-Muffs) and for the types of protection by the noise attenuation levels explained below.













- 1. The headband should be adjusted by pulling the middle band equally from both sides.
- 2. Ensure no hair or jewellery are left inside the earmuff cushions.
- 3. Fit the earmuff over the ears ensuring a tight fit around the ears.
- 4. Ensure the earmuffs completely surrounds the ears.
- 5. Press down on the headband to obtain a snug comfortable fit.

NOISE ATTENUATION LEVELS (EN352-1:2002)

	Frequency (Hz)	63	125	250	500	1000	2000	4000	8000	
MK-02	Mean Attenuation (dB)	13.4	13.6	20.9	28.6	32.4	31	35.5	31.6	
	Standard Deviation (dB)	3.7	2.4	3	4.4	4.3	3.7	4.8	3.5	
	Assumed Protection (dB)	9.7	11.2	17.9	24.3	28	27.3	30.7	28.1	
		SNR = 28	SNR = 28 dB		H = 29 dB		M = 25 dB		L = 19 dB	

- Areas of Usage $\, extcolor{-}$



Construction





Metal Production



Logistics and Storage



Wood




Textile

Ear muffs are used for high noise levels in many industries.

NOISE LEVEL MEASUREMENT -

Sound level measurement instruments, frequency analyzers and personal or ambient noise dosimeters are used for the measurement and analysis of noise levels. There are some non-technical rules to decide whether the noise level is high in the workplace environment.

- To understand the speech of a person next to him, the person needs to speak by increasing the tone of voice outside the usual tone of speech, or if it is necessary to shout to the ear for the person to understand, the noise exceeds the permissible (workable level without ear protector) level.
- If the worker is hearing noise inside his head and tinkling in his ear, he is exposed to excessive noise
- If the worker has difficulty in clearly understanding the sounds of speech and music at the end of the working day, but if he clearly understands the sounds of speech and music when he goes to work in the morning, he / she is exposed to a high level of noise. There is no doubt that if safety measures are not taken, it is possible to suffer from hearing loss in the future

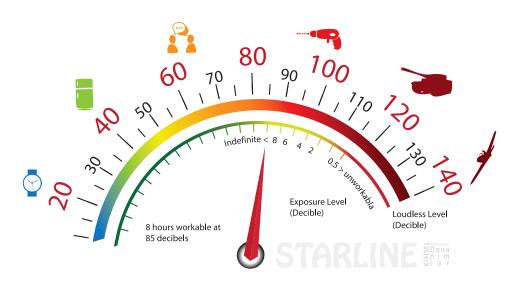

What is SNR?

The SNR value is used to compare the noise reduction capabilities of different ear protectors. The sound intensity to the ear is determined by subtracting the SNR value from the total noise level. When the minimum exposure effective value of 80dB is exceeded, the employer must provide ear

protectors and make them ready for use by workers.

eg. When an employee who experiences 106 dB of sound exposure at close range (within 1mt) uses a 26dB ear protector, the sound intensity (106-26=) will be 80dB. In this case, the lowe

Noise Level (decibels)	Working Hours			
less than 85 decibels	Indefinite			
at 85 decibels	8 hours			
at 92 decibels	6 hours			
at 95 decibels	4 hours			
at 100 decibels	2 hours			
at 110 decibels	0.5 hours			
more than 115 decibels	Unworkable			

	Sound					
Pressure Level		rel				
Lp dBSPL						
	140	Jet plane, 50 meters away				
	130	Pain threshold, painful sounds				
	120	Discomfort threshold				
	110	Deafening sounds				
	100	Disco, 1 meter away from speakers				
	90	Diesel truck, 10 meters away				
	80	Very loud sound, continuity makes deaf				
70		Vacuum cleaner				
	60	Conversation				
	50	Average level, home-office,etc				
40		Silent library				
	20	Very low, hard audible sound				
	10	Leaf rustle				
	0	Hearing threshold				

INSTRUCTIONS FOR USE



Maintenance and Cleaning

Headphones and cushions should be inspected and cleaned with a damp cloth before each reuse. Some chemicals can have a detrimental effect on these products - more information should be sought from the manufacturer.



Lifetime

Under no circumstances should the earmuffs be changed or any covers attached to the pillows. Such changes may affect the acoustic performance of the earmuffs. Earmuffs and their cushions may deteriorate with use. The full service life of the product largely depends on how it is used and where it is stored. Therefore, it is very important to examine carefully the earphones and their cushions before use and replace them if they are unsuitable for use.



Storage

When not in use, the earmuffs should be stored in their boxes away from extreme temperatures. If the earmuffs are wet, they should be allowed to dry slowly and naturally away from direct heat sources before storing them.

CONFORMITY CHECK

When the earmuff is fitted correctly, your own voice will be echoed and the surrounding sounds will not be the same as before. For optimum noise reduction, the pads should not be used with any objects that may prevent the sealing of the head (such as headbands and temples).

Earmuff should completely cover the ears.

If the earmuffs are not installed correctly and comfortably, you can contact with STARLINE officials for more information.

Order Information -

MODEL	Colour	Barcode	Quantity	Box Dimension	RG Box Weight
MK-02	Green	8680907986816	30 Pcs	52,5x31,5x61 cm	10.45 kg